

Linear

RADIANT GAS FIREPLACES



Enjoy the warmth
of our linear fireplaces.

Valor
FIREPLACES

Why Choose

Feel the heat.

All our gas fireplace radiate heat. Like feeling the sun on your skin. The best kind of heat there is.

Heater-rated

We're rated with space heaters so we put Radiant Heat Technology into every fire. You can feel it.

Works quietly.

We designed our gas fireplaces to move the heated air via natural convection—no need for a noisy blower.

Stainless Steel burner

Our precision stainless steel burners don't rust, and create an enhanced flame and ember glow that produces radiant heat.

Efficiency

Valor fireplaces are heater-rated. Our Radiant Zone Heating is up to 25% more efficient than central forced air systems.

ON COVER: L1
BIRCH 1505BLKV2
REFLECTIVE GLASS LINER 1525RGL
1" ADJUSTABLE TRIM 1575LFB

A Valor?

Improving heat.

Our HeatShift™ system redirects convective heat from your fireplace up and back into your room—keeping the TV or artwork above your fireplace safe from heat exposure.

Ceramic glass window

Valor's durable and robust ceramic glass window improves radiant performance by absorbing and distributing radiant heat.

No power?

No problem. All Valor gas fireplaces run on 4 AA batteries as the primary source of power—not as back-up power like other brands. And you'll save money on your electrical bill.

Outdoor-friendly.

All Valor gas fireplaces are rated for outdoors under a covered patio and use quality materials that exceed the requirements for outdoor use.

Logs provide heat.

High definition, low mass fiber ceramic logs heat up and glow quickly. We harness the radiating heat from our logs, just like real logs.

Built to last.

Our aluminized steel fireboxes handle high temperatures, delivering efficient radiant warmth. Our baked-on powder-coated paint offers a better texture and a more durable finish.

Safety

We put our fires through rigorous safety testing in our in-house CSA approved lab. We provide a screen with every fireplace to keep you and your loved ones safe.

Design your own.

Visit the Valor Fireplace Design Center to design your very own Valor Fireplace today.



To find out more, visit
valorfireplaces.com/why-valor

Fireplaces



L1 SEE THRU 40" X 2 VIEW
LONG BEACH DRIFTWOOD 1505DWKV2
FLUTED BLACK LINER 1615FBL
1" ADJUSTABLE TRIM 1575LFB

We pride ourselves in eye-catching linear fireplaces that also naturally provide the comfort of radiant and convective heat. All viewing areas are 14½" tall.

L1 40" VIEW (ALSO AS L1 SEE-THRU ABOVE)



L2 50" VIEW





OUTDOOR
COMPATIBLE 

PROUDLY MADE
IN NORTH AMERICA

L3 64" VIEW



Fire beds



L1 40" VIEW
MURANO GLASS 1500DGM
REFLECTIVE LINER 1525RGL
1" ADJUSTABLE TRIM 1575LFB

We design our expertly crafted media as realistic-looking as possible, and engineer them to harness radiant heat from the flames and glowing embers—each with their own unique appeal.

View our firebed videos at
valorfireplaces.com/fireplace-media

BIRCH



LONG BEACH DRIFTWOOD





SPLITWOOD



ROCKS AND SHALE
L1, L1 SEE-THRU, AND L2 ONLY



MURANO GLASS



Liners



Selecting a liner is an important choice, particularly in linear fireplaces where the liner features prominently.

Choose a liner that complements your logs as well as your fireplace's surround. Liners can appear quite different, depending on if the fire is on or off.

Visit a Valor dealer to see a sample in person.

Or, view our firebed videos at valorfireplaces.com/fireplace-media

FLUTED BLACK






L2 50" VIEW
ROCK AND SHALE 1714RSS
REFLECTIVE LINER 1725RGL
CLEAN INSTALL KIT 1730CIK

REFLECTIVE BLACK GLASS



PLAIN BLACK LINER

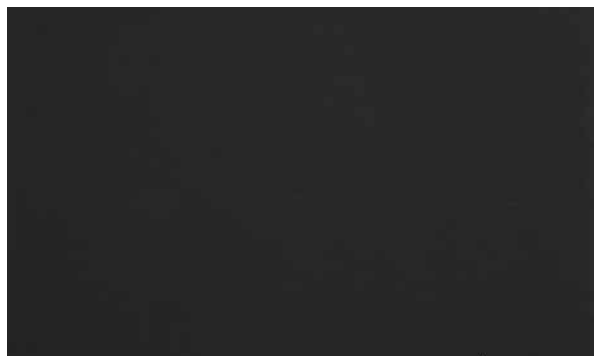

Trims

L3 64" VIEW
LONG BEACH DRIFTWOOD 1800DWK
FLUTED BLACK LINER 1815FBL
1" ADJUSTABLE TRIM 1875LFB




We've created two minimalist trims, each with unique attributes to suit your particular installation.

1" ADJUSTABLE FINISHING TRIM

The 1" trim can be inset but often sits proud of the fireplace wall. This trim's regular mesh lets out 12% more radiant heat and allows more light to escape for a brighter fire.

HeatShift recommended.

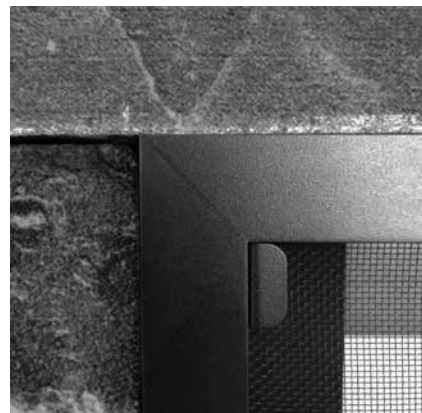

L3 64" VIEW
BIRCH 1800BLK
REFLECTIVE LINER 1825RGL
CLEAN INSTALL KIT 1830CIK



Speak with your local Valor Dealer or go to valorfireplaces.com to find out more about our types of trim.



**CLEAN INSTALL KIT
(NEW 1¼ DEPTH")**

The CIK makes it easier to finish flush up to the tile for a clean finish. Our finer mesh, on the CIK only, is barely visible.

HeatShift required.



Remote

Child Proof your remote
for safety and ease.

Accurately knows the current
temperature of your room.

Set the timer to turn the fireplace
off up to 9 hours ahead.

Set the temperature for
specific times of the day.

Program your fireplace to turn
on and off when you want at
the temperature you want.



**STANDARD WITH ALL OUR
LINEAR FIREPLACES.**




Standard throughout the Linear Series, the Valor 10 interactive remote control has up-to-the-moment information on the state of your fireplace, such as temperature, and other customizable settings. To find out more, go to valorfireplaces.com/remote

Valor 10 App

TAKE COMPLETE CONTROL

Increase or decrease flame height to find the perfect ambiance.

Use the color wheel to find the ideal temperature setting.

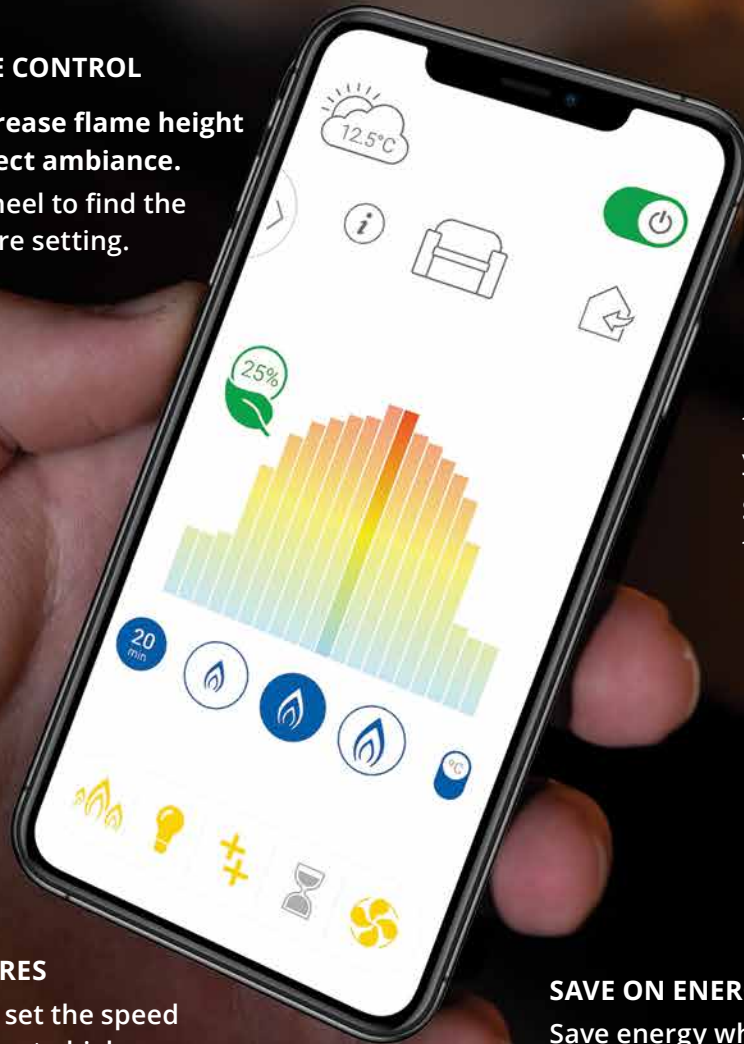

CONTROL FEATURES

If you have a fan, set the speed of the fan from low to high.

PROGRAM ON THE GO

Program days, times and temperature settings to match your lifestyle.

Set a countdown timer so your fireplace shuts off automatically.

SAVE ON ENERGY COSTS

Save energy while enjoying a changing, realistic flame with ECO mode.

Choose time and the percentage of energy saved is shown in the circle/leaf.

The Valor 10 remote pairs with the Valor 10 App so you can control your linear fireplace with your smartphone. To find out more, go to valorfireplaces.com/valor10



HeatShift



KEEPS WALL COOLER

Pioneered by Valor, our unique HeatShift System naturally circulates up to 125 cubic feet of convective heat per minute through hidden ducts and back into the room—avoiding surface areas above the fireplace.

So valued artwork, a TV or construction materials stay cooler—ideal for wood cladding.

IMPROVES PERFORMANCE

Harnessing convective warmth, up to 60% of fireplace heat rises and flows through HeatShift and

back into the room. The remaining radiant heat emanates from the fireplace, keeping you warm.

DESIGN FLEXIBILITY

- Run standard finishing materials right up to the fireplace surround, including drywall, wood, tile, and stone.
- Install mantels lower than usual at a one-to-one ratio of depth to height from the fireplace surround when using HeatShift.
- Several flexible options for construction and design

CONSTRUCTION MADE EASY

Unlike many competing products, HeatShift is built and designed in North America for North American homes, meeting building code requirements.

NO ELECTRICITY REQUIRED

- Heatshift circulates heat naturally using gravity and Valor product ingenuity—no need for a fan or electricity. No power—no problem.
- Valor fully ducts HeatShift for clean, safe air quality.


ZONE HEATING

Looking to heat other areas in your home? Our optional Remote Blower helps manage your heat effectively by distributing warmth to other areas of your home—such as bedrooms, hallways or utility rooms.


L1
BIRCH 1505BLKV2
FLUTED BLACK LINER 1515FBL
CLEAN INSTALL KIT 1530CIK




FRONT OUTLET

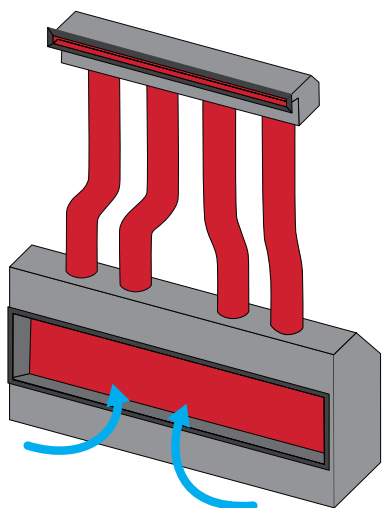

SIDE OUTLETS

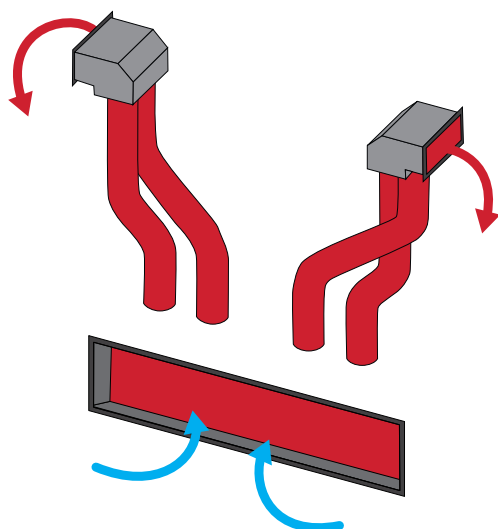


TOP HIDDEN VALANCE

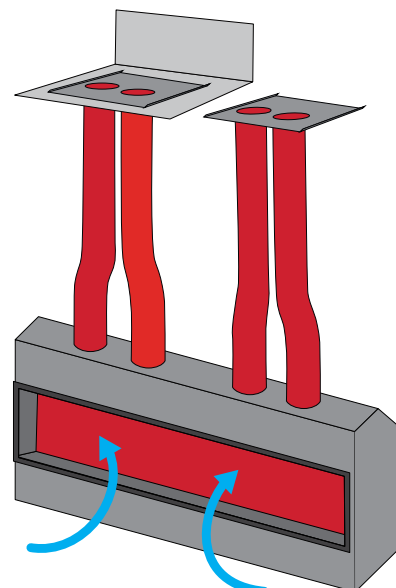


DIMENSIONS

L1

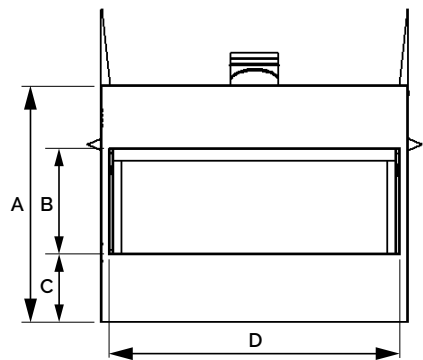

L1 SEE-THRU

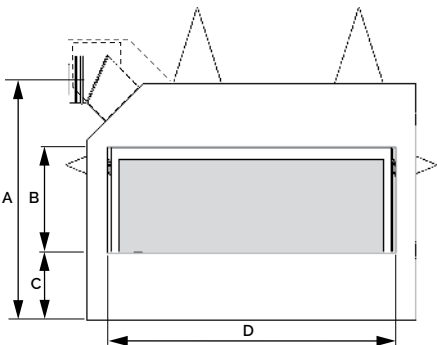


L1 INSTALL
MANUAL



ALWAYS REFER TO THE MANUAL
FOR COMPLETE AND ACCURATE
INSTALLATION INSTRUCTIONS.
valorfireplaces.com/manuals




L1 SEE-THRU
INSTALL MANUAL

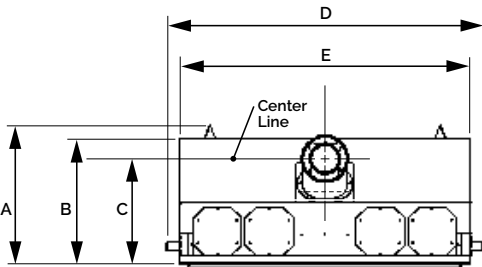

	L1	L1 S-T
A	19 ⁷ / ₈	—
B	18	18 ¹ / ₂
C	15 ¹ / ₁₆	—
D	46	51
E	42	45 ¹ / ₄

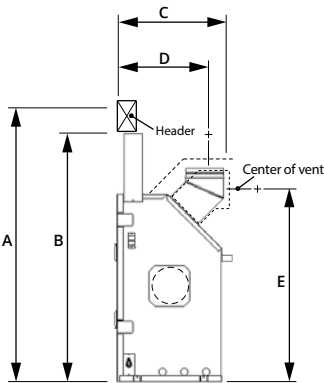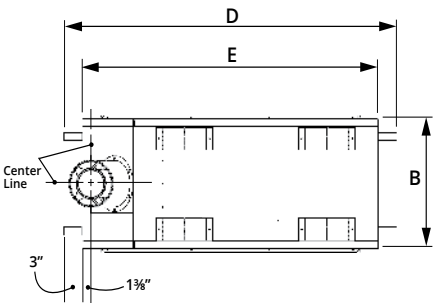

	L1	L1 S-T
A	44 ¹ / ₂ * [†]	44 ¹ / ₂ * [†]
B	43** [†]	43** [†]
C	18 ¹ / ₂	—
D	15 ¹ / ₁₆	—
E	33 ³ / ₈	32 ³ / ₈




*Minimum to top of cement board
**Minimum to underside of header




HOMEOWNER'S MANUAL

L2

L3

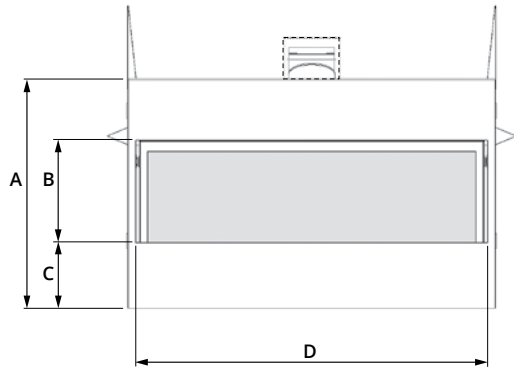

	L2	L3
A	32 $\frac{3}{8}$	32 $\frac{3}{8}$
B	14 $\frac{1}{2}$	14 $\frac{1}{2}$
C	9 $\frac{3}{8}$	9 $\frac{3}{8}$
D	49 $\frac{1}{16}$	64



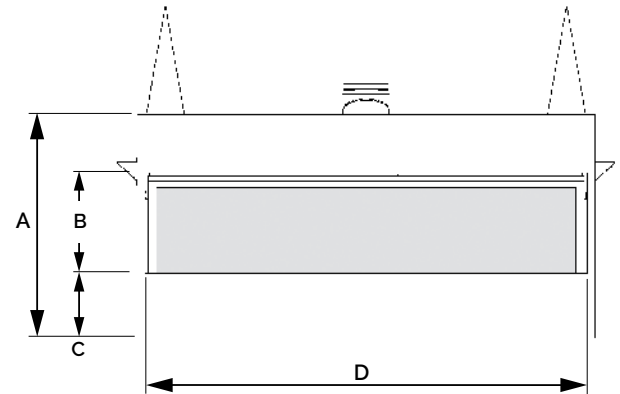


L2 INSTALL MANUAL




L3 INSTALL MANUAL

	L2	L3
A	19 $\frac{7}{8}$	20
B	18	18
C	15 $\frac{1}{16}$	15 $\frac{1}{16}$
D	57 $\frac{3}{4}$	72
E	52	66 $\frac{1}{4}$

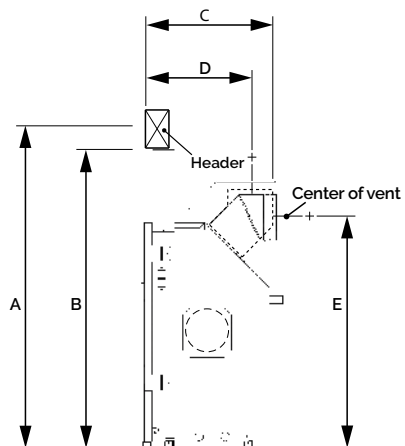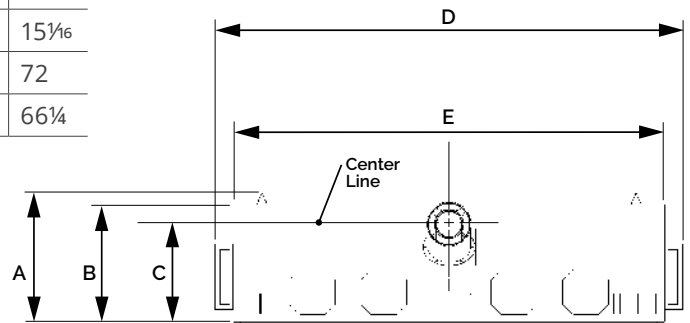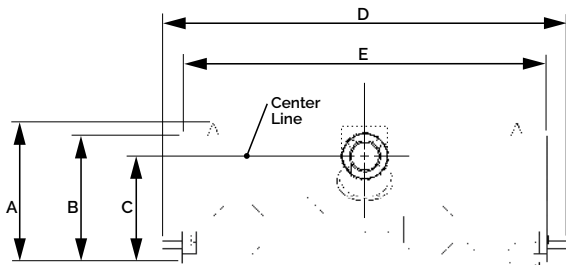

	L2	L3
A	44 $\frac{1}{2}$ *	49 $\frac{3}{8}$ *
B	43**	48**
C	18 $\frac{1}{2}$	18 $\frac{3}{8}$
D	15 $\frac{1}{16}$	15 $\frac{1}{16}$
E	33 $\frac{1}{8}$	—

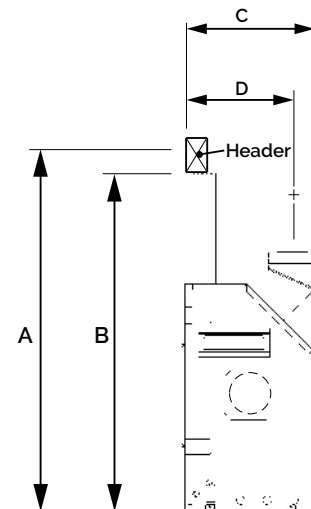

*Minimum to top of cement board
**Minimum to underside of header

SPECIFICATIONS

ENGINES DIRECT VENT	L1	L1 S-T	L2	L3
Natural Gas	1500KN	1600KN	1700KN	1800KN
Propane	1500KP	1600KP	1700KP	1800KP

FUEL BEDS				
Birch	1505BLKV2	1505BLKV2	1705BLKV2	1800BLK
Long Beach Driftwood	1505DWKV2	1505DWKV2	1705DWKV2	1800DWKV2
Splitwood	1500SWKV2	1500SWKV2	1705SWKV2	1800SWK
Murano Glass	1500DGM	1500DGM	1700DGM	1800DGMV2
Rock and Shale	1514RSS	1514RSS	1714RSS	

LINERS				
Fluted Black	1515FBL	1615FBL	1715FBL	1815FBL
Reflective Glass	1525RGL	1625RGL	1725RGL	1825RGL
Plain Black	1560PBL	n/a	1760PBL	1860PBL

TRIMS				
1" Adjustable Trim Black	1575LFB	1575LFB	1775LFB	1875LFB
Clean Install kit*	1530CIK	1530CIK	1730CIK	1830CIK
3½" Black	1550LSBV2	1550LSBV2		
5¼" Black				1850LSB

*requires HeatShift

REMOTE CONTROL

Valor 10 Remote	GV60	<i>standard</i>
Valor 10 app	GV60WiFi	<i>optional</i>
Remote Battery and Wall Switch	RBWSK	<i>standard</i>

HEATSHIFT (recommended)

Choose from options below:

48" Plenum + optional white Finishing Frame	LDK1 + LDK2
38" Plenum + optional white Finishing Frame	LDK4 + LDK5
30" Plenum + optional white Finishing Frame	LDK9 + LDK10
14" Plenum (2), including white Grilles	LDK3
Top hidden valance	LDK7

OPTIONAL

Outdoor Conversion Kit	GV60CKO
Remote Blower	1270RBK
Circulating Fan (for GV60VM)	1595CFKV2

EFFICIENCY

BTU/Hour	Maximum Input	Minimum Input	Max. Output w/out fan	EnerGuide*
1500KN	30,000	19,000	21,705	66%
1500KP	30,000	21,000	20,409	67%
1600KN	30,000	19,000	22,116	69%
1600KP	30,000	21,000	19,198	69%
1700KN	36,000	21,000	25,916	67%
1700KP	36,000	22,500	25,347	70%
1800KN/KP	42,000	23,000	30,484	67%

Certified to ANSI Z21.88-2017/CSA 2.33-2017 Vented Gas Fireplace Heater American National Standard. CGA-2.17-91 Gas Fired Appliances for use at High Altitudes.



* EnerGuide Ratings and outputs have been determined without a fan/blower, using the CSA P4.1-15 test method.

Use this table to determine the level of efficiency and performance of your fireplace. Rating are based on Valor's top performing fireplaces in each of the column's categories.

⚠ WARNING

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov



valorfireplaces.com



L2
SPLITWOOD 1705SWKV2
REFLECTIVE GLASS LINER 1725RGL
CLEAN INSTALL KIT 1730CIK
HEATSHIFT LDK7

BRLIN26E AUG

valor
FIREPLACES