



regency-fire.com

WHY CHOOSE REGENCY?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do ever-since that very first stove rolled off the production line over 40 years ago. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranties on our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

A photograph of a man and a woman sitting on a couch, looking towards a fireplace. The man is in the foreground, seen from the back, wearing a white sweater. The woman is next to him, also seen from the back, with blonde hair. They are both looking at a fireplace in the background where a fire is burning. The scene is cozy and warm.

Why Regency? Because it's **more** than a fireplace!

TABLE OF CONTENTS

Regency Atmosphere Gas Inserts	
Gi25LE	06
Gi27LE	08
Gi29LE/Gi29LU	10
Gi33LE	12
 Regency Liberty® Radiant Gas Inserts	
LRi3E	14
LRi4E	16
LRi6E	18
 Regency Energy™ Standing Pilot Gas Inserts	
Regency Liberty® Standing Pilot Gas Inserts	
E33	20
L234	21
U31	22
 Specifications	30





ΔTMOsphere

COLLECTION

Gas Inserts Redefined

Re-defining what's possible with a gas insert; the Atmosphere Collection was designed from the ground up to deliver more. Sized and designed to fit into more spaces while still maintaining an industry-leading viewing area and provide unmatched views of our new revolutionary infusion burner technology. Pick your look with mix & match accessories totaling almost 450 different combinations of logs, faceplates, surrounds, and interior panels, so you get the look that best suits your unique style and your unique home. Enjoy more standard features with built-in fan to help improve room heating capacity and ember-bed lighting standard on most models.

More technology, more options, more realism, and more value. With Regency's Atmosphere collection you get more!

INFUSION BURNER



Experience The Most Realistic Fire

Inspired by nature and fueled by innovation, Regency's new patent-pending infusion burner technology delivers an unparalleled realistic flame and log set. By cleverly infusing the burner into the logs, our team of engineers have created an unmatched flame picture that wraps naturally around the logs and dances effortlessly in the firebox - giving you the appearance and beauty of a real wood fire, with all the convenience of gas.

Experience the new Infusion burner throughout our Atmosphere lineup and enjoy flames so realistic your guests will have a hard time telling whether it's wood or gas!

EXPERIENCE THE
INFUSION BURNER
INSIDE G129 INSERT:



REGENCY ATMOSPHERE Gi25

Extra Small Gas Insert



Gi25 shown with 3-sided faceplate and driftwood set and black brick panels.



3-sided finishing trim, painted black inner panels, and driftwood log set



Regular faceplate, 4-sided finishing trim, painted black inner panels, and oak log set



Regular 3-sided faceplate, painted black inner panels, and oak log set

Gi25LE • Extra Small Gas Insert

This unit personifies the expression, “Great things come in small packages.” Designed to fit into smaller spaces, the Gi25LE sports an impressive viewing area highlighting its infusion burner, an improved high-definition artisan-crafted log set, and a modern, flush design.

SPECIFICATIONS Gi25LE	NATURAL GAS	PROPANE
Input (BTU)	20,500	20,500
Turn down to (BTU)	14,500	17,000
Efficiency (steady state)	63.33%	68.33%
EnerGuide Rating (Canada only)	63.60%	63.60%

DIMENSIONS	
Height	17"
Width	25"
Depth	15"
Viewing Area	212 sq. in.



Gi25LE shown with 3-Sided finishing trim, brown brick panels and oak log set.



Regular 4-sided faceplate, painted black inner panels, and oak log set



Regular faceplate, adjustable hearth riser, and birch log set



3-sided trim, oversized backing plate, and oak log set

STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

OPTIONS

- Multiple faceplate styles
- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Premium and traditional surrounds in various colors
- Wifi Kit for app control
- Flush installation options
- Mantel deflector for reduced clearances
- Oversized and custom backing plates
- Hearth trim kit for raised hearth installations
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY ATMOSPHERE Gi27

Small Gas Insert



Gi27 shown with 4-sided faceplate and oak log set and black brick panels



3-sided finishing trim, herringbone inner panels, and driftwood log set



Regular faceplate, 4-sided finishing trim, painted black inner panels, and oak log set



Regular 3-sided faceplate, painted black inner panels, and birch log set

Gi27LE • Small Gas Insert

The Gi27LE packs impressive performance into a compact form. With its striking viewing area, innovative burner design, and sleek, flush styling, it's built to stand out in any small space.

SPECIFICATIONS Gi27LE	NATURAL GAS	PROPANE
Input (BTU)	25,000	22,000
Turn down to (BTU)	17,000	17,500
Efficiency (steady state)	69.11	68.58
EnerGuide Rating (Canada only)	63.6%	64.15%

DIMENSIONS	
Height	18"
Width	27"
Depth	15"
Viewing Area	258 sq. in.



Gi27LE shown with 3-sided finishing trim, black panels and driftwood logs



Regular 4-sided faceplate, herringbone inner panels, and oak log set



Regular faceplate, adjustable hearth riser, and birch log set



3-sided trim, oversized backing plate, and driftwood log set

STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

OPTIONS

- Multiple faceplate styles
- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Premium and traditional surrounds in various colors
- Wifi Kit for app control
- Flush installation options
- Mantel deflector for reduced clearances
- Oversized and custom backing plates
- Hearth trim kit for raised hearth installations
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY ATMOSPHERE Gi29

Medium Gas Insert



Gi29LE shown with 3-sided flush faceplate, black reflective glass inner panels, and oak log set.



3-sided finishing trim, black inner panels, and oak log set



Regular faceplate, premium brushed nickel surround, black inner panels, and oak log set



Regular 3-sided faceplate, painted black inner panels, and oak log set

Gi29LE | Gi29LU • Medium Gas Inserts

Experience beauty in a standard sized firebox. The first of our Atmosphere Collection, the Gi29 exemplifies luxury with a dynamic flame filled firebox designed to fit into the most commonly occurring fireplace openings.

SPECIFICATIONS Gi29LE	NATURAL GAS	PROPANE
Input (BTU)	31,500	31,500
Turn down to (BTU)	17,000	17,000
Efficiency (steady state)	71.70%	70.20%
EnerGuide Rating (Canada only)	63.88%	62.33%

MINIMUM FIREPLACE OPENING	
Width (front)	29"
Width (rear)	20"
Height	20-1/4"
Depth	16-3/4"



Gi29LE shown with a regular faceplate with traditional antique copper surround, brown brick inner panels and High definition oak log set.



Regular 4-sided faceplate, painted black inner panels, and driftwood log set



Regular faceplate, adjustable hearth riser, herringbone inner panels and birch log set



3-sided trim, oversized backing plate, castlestone inner panels and oak log set

STANDARD FEATURES

- NEW: innovative, patent-pending infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow (LE units only)
- Proflame II GTMF remote control system (LE units only)
- Standing pilot (Direct spark ignition - LU units only)
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

OPTIONS

- Oak, birch or driftwood log sets
- Faceplates in various designs
- Premium and traditional surrounds in various colors
- Interior panels in Herringbone, Castlestone, Brown, Volcanic Black or Painted Black
- Reflective black glass interior panels
- Oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kit for raised hearth installations
- Wifi Kit for app control
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY ATMOSPHERE Gi33

Large Gas Insert



Gi33LE shown with a regular faceplate, premium sunset bronze surround, painted black inner panels, and birch log set.



3-sided finishing trim, black inner panels, and oak log set



Regular faceplate, premium traditional surround in antique copper, painted black inner panels, and oak log set



Regular 3-sided faceplate, painted black inner panels, and oak log set.

Gi33LE • Large Gas Insert

This large version of our stunning Atmosphere Collection, the Gi33LE offers luxurious flame pictures and flame pictures in a big firebox. Designed to maximize heat output and flame enjoyment of the most commonly occurring large fireplace openings.

SPECIFICATIONS Gi33LE	NATURAL GAS	PROPANE
Input (BTU)	38,500	36,500
Turn down to (BTU)	20,500	20,000
Efficiency (steady state)	68.60%	69.50%
EnerGuide Rating (Canada only)	64.30%	64.32%

MINIMUM FIREPLACE OPENING	
Width (front)	33"
Width (rear)	22-3/8"
Height	24"
Depth	18"



Regular 4-sided faceplate, painted black inner panels, and driftwood log set



Regular faceplate, adjustable hearth riser, herringbone inner panels and birch log set



3-sided trim, oversized backing plate, castlestone inner panels and oak log set

STANDARD FEATURES

- NEW: innovative, patented infusion burner
- Invisimesh safety screen for a clear view of the fire
- Ember bed lighting for a realistic glow
- Proflame II GTMF remote control system
- Variable speed blower for max heat distribution
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Limited lifetime warranty

OPTIONS

- Oak, birch or driftwood log sets
- Faceplates in various designs
- Premium and traditional surrounds in various colors
- Interior panels in Herringbone, Castlestone, Brown, Volcanic Black or Painted Black
- Reflective black glass interior panels
- Oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kit for raised hearth installations
- Wifi Kit for app control
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY LIBERTY® RADIANT LRi3E

Compact Gas Fireplace Insert



LRi3E shown with Vignette faceplate in Black and Rustic Brown interior panels.



Small backing plate and Vignette faceplate in Platinum



Regular backing plate and Vignette faceplate in Tuscan Sunset



Arched backing plate and arched Vignette faceplate in Black

COMPACT AND EFFICIENT

Regency is proud to present the newest addition to the Liberty gas insert family, now available in a smaller size to fit a larger array of spaces. Enjoy timeless, artisan-crafted logs with the combined power of radiant & convective heat. Vignette designer faceplates provide you with the choice to create a modern transitional look or a traditional look with Georgian & Tudor styles.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	20,500	19,000
Turn down to (BTU)	14,000	15,500
Efficiency (steady state)	73.12%	74.59%
EnerGuide Rating (Canada only)	66.25%	66.70%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	28-1/2"
Width (rear)	21-5/8"
Height	19-1/2"
Depth	14-1/2"



Regular backing plate, Vignette faceplate in Black and Craftsman inlay in Black



Regular backing plate, Vignette faceplate and Door inlay in Black



Arched backing plate and arched Vignette Tudor faceplate in Black

STANDARD FEATURES

- Sleek and compact size to accommodate for a variety of spaces
- Versatile design choices to create a traditional or modern transitional look
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- Variable speed blower for max heat distribution
- Proflame II GTMF remote control system
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Hearth trim kit and mantel deflector
- Regency flex liners
- Propane conversion kit
- Proflame II Gas insert hardwire kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY LIBERTY® RADIANT LRi4E

Medium Gas Fireplace Insert



LRi4E shown with regular backing plate, Vignette faceplate in Black, Door Inlay in Black and Rustic Brown Brick Panels.



Small backing plate and Vignette faceplate in Platinum



Regular backing plate and Vignette faceplate in Tuscan Sunset



4-sided regular backing plate and Vignette faceplate in Black

PERFORMANCE AND STYLE

A source of both radiant and convective heat, the LRi4E delivers high-efficiency heat safely and reliably throughout your home. Turn on the integrated circulating fan to intensify the warming effect. This statement fireplace can be customized with Regency's selection of accent trim options.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	31,000	31,000
Turn down to (BTU)	22,000	26,000
Efficiency (steady state)	71.45%	73.01%
EnerGuide Rating (Canada only)	70.27%	69.36%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	30"
Width (rear)	22"
Height	20"
Depth (without spacer)	18"
Depth (with spacer)	15-3/4"



Regular backing plate, Vignette faceplate in Black and Craftsman inlay in Black



Regular backing plate, Vignette faceplate in Black and Door inlay in Black



Regular backing plate and Vignette Georgian faceplate in Black

STANDARD FEATURES

- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY LIBERTY® RADIANT LRi6E

Large Gas Fireplace Insert



LRi6E shown with decorative arched vignette and arched backing plate in Black.



Small backing plate and Vignette faceplate in Tuscan Sunset



Regular backing plate and Vignette faceplate in Black



4-sided regular backing plate and Vignette faceplate in Platinum

RADIANT CONVECTIVE HEAT

This large, high-efficiency heater provides intense radiant heat instantly. Enjoy strong heat in the area directly in front of your fireplace or turn on the included heat circulating blower to distribute comforting warmth into the far corners of your room. The Regency Liberty LRi6E large gas insert is a stylish, reliable source of warmth and ambiance, even during a power outage.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	38,000	38,000
Turn down to (BTU)	25,000	30,000
Efficiency (steady state)	73.01%	73.01%
EnerGuide Rating (Canada only)	70.37%	70.37%

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	34"
Width (rear)	25"
Height	24"
Depth (without spacer)	19-1/2"
Depth (with spacer)	16-3/4"



Regular backing plate, Vignette faceplate in Black, Door inlay in Black



Regular backing plate, Vignette Tudor faceplate in Black



Arched backing plate and arched Vignette faceplate in Black

STANDARD FEATURES

- Black steel interior panels
- Log set with ceramic ember bed
- Heat radiating ceramic glass with safety screen
- 6-tube heat exchanger for max efficiencies
- Variable speed blower for max heat distribution
- Electronic ignition with SureFire™ switch
- Proflame I GTMF remote control
- 6-tube heat exchanger for max efficiencies
- 30° angled flue for versatile installation
- Direct vent to increase efficiency & warmth retention
- Natural gas
- Limited lifetime warranty

OPTIONS

- Vignette faceplates in various designs and colors
- Vignette inlays in various designs and colors
- Faceplate spacer for shallow fireplace installations
- Interior panels in Old Town Red, Rustic Brown or Volcanic Black
- Reflective black enamel interior panels
- Small, regular, arched, oversized and custom backing plates
- Mantel deflector for reduced clearances
- Hearth trim kits for raised hearth installations
- Wall thermostat
- Regency flex liners
- Propane conversion kit

Note: Fireplace opening sizes may differ depending on option chosen and type of masonry fireplace.

REGENCY ENERGY™ E33

Large Gas Fireplace Insert



E33 shown with Vignette door inlay. Door inlay in Black and brick panels.

AN ATTRACTIVE HEAT SOURCE

The E33 large gas fireplace insert is a high-efficiency heat source that is designed to seal old drafty fireplaces and provide controllable gas heat. This unit is a sealed system that uses outside air for combustion – making it perfect for airtight homes.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	38,000	35,500
Turn down to (BTU)	20,000	19,000
Efficiency (steady state)	70.14%	70.73%
EnerGuide Rating (Canada only)	60.70%	61.49%

STANDARD FEATURES

- Heat radiating ceramic glass with safety screen
- Log set with glowing embers
- Flame height adjustment control
- Variable speed blower
- Proflame I GTM remote control
- 30° angled flue for versatile installations
- Standing pilot system
- Direct spark ignition
- Natural gas
- Limited lifetime warranty

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	32-1/4"
Width (rear)	25"
Height	24"
Depth (without spacer)	18"
Depth (with spacer)	16-3/4"

OPTIONS

- Faceplates in low profile or Vignette design
- Vignette door inlay in various colors
- Custom backing plate
- Brick panels
- Wall thermostat
- Installation spacer
- Regency flex liners
- Propane conversion kit

REGENCY LIBERTY® L234

Small Gas Fireplace Insert



L234 shown with Low Profile faceplate and brick panels.

COMPACT SIZE FOR TIGHTER OPENINGS

Designed to fit smaller openings in existing masonry fireplaces, and inefficient steel fireplaces, the L234 small gas insert delivers efficient heat with stylish good looks. Highly realistic logs make this quality, small gas insert an excellent choice for small to medium size spaces.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	23,500	21,500
Turn down to (BTU)	16,500	17,000
Efficiency (steady state)	73.94%	74.67%
EnerGuide Rating (Canada only)	63.34%	64.73%

STANDARD FEATURES

- Heat radiating ceramic glass with safety screen
- Log set with glowing embers
- Flame height adjustment control
- Variable speed blower
- Proflame I GTM remote control
- Standing pilot system with 7-Day timed shut off
- Direct spark ignition
- Direct vent to increase efficiency & warmth retention
- Installation spacer
- Natural gas
- Limited lifetime warranty

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)	
Width (front)	25"
Width (rear)	16"
Height	17"
Depth (without spacer)	14"
Depth (with spacer)	--

OPTIONS

- Low profile faceplate
- Custom backing plate
- Adjustable hearth riser
- Brick panels
- Basic or programmable thermostat
- 3" to 2" air intake reducer
- Regency flex liners
- Propane conversion kit

Note: This unit is only available in select markets.

REGENCY ENERGY™ U31

Medium Gas Fireplace Insert



U31 shown with Low Profile faceplate and brick panels.

CUSTOMIZE TO SUIT YOUR STYLE

The Regency Energy U31 unit is a complete fireplace system that can turn your existing wood fireplace into a high efficiency, clean-burning gas heater. Enjoy peace of mind even during power outages; all Regency gas inserts operate safely and effectively without electricity.

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	30,000	28,000
Turn down to (BTU)	20,600	22,000
Efficiency (steady state)	58.45%	59.29%
EnerGuide Rating (Canada only)	51.42%	47.41%

STANDARD FEATURES

- Heat radiating ceramic glass with safety screen
- Log set with glowing embers
- Flame height adjustment control
- Variable speed blower
- Proflame I GTM remote control
- Standing pilot system
- Direct spark ignition
- B vent
- Installation spacer
- Natural gas
- Limited lifetime warranty

MINIMUM FIREPLACE OPENING (VIGNETTE FACEPLATE)

Width (front)	26-1/2"
Width (rear)	22-1/2"
Height	21"
Depth (without spacer)	--
Depth (with spacer)	15"

OPTIONS


- Low profile faceplates
- Custom backing plate
- Contour faceplate
- Hearth trim kit
- Black louvers
- Brick panels
- Basic or programmable wall thermostat
- Regency flex liners
- Propane conversion kit

OTHER OPTIONS

DIRECT VENT TECHNOLOGY

A Regency gas insert is a specially engineered, sealed fireplace that slips into your existing masonry or pre-fab fireplace to create a high-efficiency heating system with a beautiful fire. The airtight firebox uses outside air for combustion, helping maintain indoor air quality and keeping all the warmth generated from your fireplace in your home.


Even when the fireplace is turned off, the sealed system will prevent cold air from entering the home and warm air from leaving.



**May be reversed on certain models.*

PROFLAME II GAS INSERT HARDWIRE KIT

This kit allows you to have a hard-wire electrical connection within your existing fireplace for a safe and cord free installation.




INTELLIGENT IGNITION SYSTEM*

Regency gas fireplace inserts feature an Intelligent Ignition System that lights the pilot only when needed, reducing gas usage and costs. In colder climates, it can be set to Continuous Pilot Mode (CPI), keeping the pilot lit for up to seven days. With a new 5-second Flame Failure Response Time (FFRT) sensor, it ensures reliable ignition even in cold conditions, enhancing performance and efficiency.

**Not available on L234, U31, E33, Gi29LU.*

SPREAD THE WARMTH

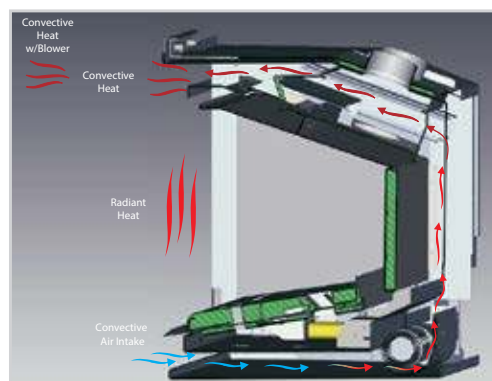

Blower

REMARKABLE EFFICIENCY

The precision-engineered heat exchanger systems dramatically increase the overall heating efficiency of these Regency gas inserts. The cold air from your room passes through the pre-heated heat exchanger system, which is then re-distributed back into your room as comforting warm air (also known as convection heat).

POWERFUL RADIANT HEAT

Not only do these gas inserts include the latest innovations in fireplace technology and efficiencies, they also generate a large amount of radiant heat from the flames of the fire package. The heat from the fire radiates through the ceramic glass and transfers that warmth to you, providing the perfect combination of radiant and convective heat distribution.

VARIABLE SPEED BLOWER TO MAXIMIZE EFFICIENCY

Regency blowers are a standard feature with all gas inserts. A blower will let you enjoy the warmth of your fireplace from any corner of your living space. Our quiet blowers increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward, distributing it further, and evenly into your room.

ATMOSPHERE COLLECTION – ACCESSORIES

Mix & match accessories along with almost 450 different combinations create the look you desire. The modular accessory system, featured in our most flexible gas inserts ever, enables you to tailor your fireplace to match your home and décor perfectly.

FRONT OPTIONS



3-sided & 4-sided
Finishing Trim



Regular Faceplate
with Premium Sunset
Bronze Surround



Flush 3-Sided Faceplate



Flush 4-Sided Faceplate



Flush Faceplate with
Traditional Surround

PREMIUM SURROUNDS



Black



White



Sunset Bronze



Grey



Brushed Nickel



Black



Brushed Antique
Copper

TRADITIONAL SURROUNDS

INTERIOR PANEL OPTIONS



Brown Brick



Herringbone Brick



Volcanic Black Brick



Painted Black



Reflective Black Glass

FIREBED OPTIONS



Oak Log Set



Birch Log Set



Driftwood Log Set

BACKING PLATES



Custom 3-sided



Custom 4-sided



Oversized

ATMOSPHERE COLLECTION – SPECIFICATIONS

ACCESSORIES		Gi25 (ELECTRONIC IGNITION)	Gi27 (ELECTRONIC IGNITION)	Gi29LU STANDING PILOT 820 (US ONLY)	Gi29LE • Gi33LE ELECTRONIC IGNITION
Ceramic Glass		✓	✓	✓	✓
Proflame II Remote Control		✓	✓	•	✓
On/Off Remote Control with Thermostat		•	•	✓	•
Blower (with Fan Speed Control)		✓	✓	✓	✓
Emberbed Lights		•	✓	•	✓
Inner Panels (must choose 1)	Brown Brick	★	★	★	★
	Herringbone Brick	★	★	★	★
	Volcanic Black Brick	★	★	★	★
	Reflective Black Glass	•	★	★	★
	Painted Black	✓	✓	★	★
Faceplates with Safety Screen (must choose 1)	Regular	★	★	★	★
	Flush 3-Sided	★	★	★	★
	Flush 4-Sided	★	★	★	★
	3-Sided Finishing Trim	★	★	★	★
	4-Sided Finishing Trim	★	★	★	★
Premium Surrounds	Black	★	★	★	★
	Grey	★	★	★	★
	White	★	★	★	★
	Sunset Bronze	★	★	★	★
	Brushed Nickel	★	★	★	★
Traditional Surrounds	Black	★	★	★	★
	Brushed Antique Copper	★	★	★	★
Backing Plates	Oversized	★	★	★	★
	Custom 3-Sided	★	★	★	★
	Custom 4-Sided	★	★	★	★
Media (must choose 1)	Driftwood Log Set	★	★	★	★
	Birch Log Set	★	★	★	★
	Oak Log Set	★	★	★	★
	*Log Grate/Ember Media (Must order when purchasing either oak or Birch log set)	•	•	★	★
Wall Thermostat	Basic	★	★	★	★
	Programmable	★	★	★	★
Wifi Kit		★	★	•	★
Mantel Deflector		★	★	★	★
Adjustable Hearth Trim		★	★	★	★
Turn down flame modulator		✓	✓	✓	✓
Intelligent ignition system		✓	✓	•	✓
Propane Conversion Kit		★	★	★	★
30° angled flue		✓	✓	✓	✓
Gas Insert Hardwire Kit		★	★	•	★

• Not available ✓ Standard ★ Optional


NOTE: The premium surrounds may only be used on the regular faceplate and the traditional surrounds on the flush 3-sided faceplate.

LIBERTY OPTIONS


VIGNETTE FACEPLATE OPTIONS (NOT AVAILABLE ON ALL MODELS)




Vignette with 3-sided
Backing Plate




Vignette with 4-sided
Backing Plate



Tudor Rustic Vignette Faceplate



Arched Vignette Faceplate




Decorative Arched
Vignette Faceplate


BACKING PLATE OPTIONS*




Small Backing Plate




Arched Backing Plate



Regular Backing Plate



4-sided Regular Backing Plate



Oversized Backing Plate

**Custom sizes also available*

VIGNETTE INLAY OPTIONS



Vignette Door Inlay

VIGNETTE FACEPLATE & VIGNETTE INLAY FINISHES



Black



Tuscan Sunset



Platinum
*(Not available
for inlays)*

INNER PANELS



Reflective Black
Enamel Panels




Standard -
Rustic Brown



Standard -
Old Town Red
(While Quantities Last)



Standard -
Volcanic Black



Black Steel
(Available for LRi4E only)

ACCESSORIES

ACCESSORIES - AT A GLANCE				LRI3E	LRI4E	LRI6E	E33	U31	L234
Backing plates	Small			★	★	★	•	•	•
	Regular			★	★	★	•	•	•
	4-sided regular			★	★	★	•	•	•
	Oversized			★	★	★	•	•	•
	Arched			★	★	★	•	•	•
Vignette faceplates	Vignette		Black	★	★	★	•	•	•
			Platinum	★	★	★	•	•	•
			Tuscan sunset	★	★	★	•	•	•
	Vignette – 4-sided		Black	•	•	•	★	•	•
	Rustic Vignette	Tudor	Black	★	★	★	•	•	•
	Arched Vignette	Arched	Black	★	★	★	•	•	•
		Decorative Arched	Black	★	★	★	•	•	•
Vignette inlays	Door inlay		Black	★	★	★	★	•	•
	Craftsman inlay		Black	★	★	★	•	•	•
Low profile faceplates	Low profile – 3-sided		Black	•	•	•	★	★	★
	Low profile – 3-sided – oversize		Black	•	•	•	★	•	•
	Low profile – 3-sided – custom		Black	•	•	•	★	★	★
Contour faceplate			Black	•	•	•	•	★	•
Louvers			Black	•	•	•	•	★	•
Inner panels	Bricks		Rustic brown	★	★	★	★	★	★
			Old town red	★	★	★	★	★	★
			Volcanic black	★	★	★	•	•	•
	Steel		Black	•	★	✓	✓	✓	✓
	Reflective		Black enamel	★	★	★	•	•	•
Safety screen			✓	✓	✓	✓	✓	✓	
Spacer			•	★	★	•	•	✓	
Hearth trim			★	★	★	★	★	★	
Variable speed blower			✓	✓	✓	✓	✓	✓	
Wall thermostat			★	★	★	★	★	★	
Remote control	Proflame GT		•	•	•	•	✓	•	
	Proflame GTM		•	•	•	✓	•	✓	
	Proflame GTMF		✓	✓	✓	•	•	•	
Turn down flame modulator			✓	✓	✓	✓	✓	✓	
Direct vent			✓	✓	✓	✓	•	✓	
B-Vent			•	•	•	•	✓	•	
Intelligent Ignition system			✓	✓	✓	•	•	•	
Propane conversion kit			★	★	★	★	★	★	

• Not available

✓ Standard

★ Optional

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information.

OTHER OPTIONS

MAXIMIZING COMFORT AND EFFICIENCY

Regency Fireplace Inserts deliver controllable heat solutions that combine the latest in radiant and convection heat technology with innovative features:

- Adjustable flame/heat control with Proflame remote controls (not available for U31)
- Heat radiating ceramic glass for maximum radiant heat
- Safety screen
- Variable speed blower to distribute heat into the farthest corners of your room
- Intelligent Ignition System* features fuel-saving intermittent pilot ignition (IPI), 7-day continuous pilot mode (CPI), and 5-second Flame Failure Response Time (FFRT) for more reliable startups, even in cold weather.
- Power's Out, Heat's On. Never worry about being cold during a power outage again! All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.

*Not available for L234, U31, E33, Gi29LU.

REMOTE CONTROL - INCLUDED



Proflame I GTMF Remote Control
*May be black on select models.



Proflame II GTMF Remote Control

Create optimal comfort with ease and convenience at the touch of a button with a Regency remote control. Our **user-friendly programmable controls** can be set, adjusted, and programmed for your fireplace to turn on at the temperature you want, when you want it.

FEATURE	DESCRIPTION	PROFLAME REMOTES		
		GT	GTM	GTMF
On/off		✓	✓	✓
Child lock		✓	✓	✓
LCD backlit screen		✓	✓	✓
Temperature display	°F / °C	✓	✓	✓
Thermostat	one setting (all days)	✓	✓	✓
Smart thermostat**		✓	✓	✓
Flame adjustment	(6 levels)	•	✓	✓
Fan control	(6 levels)	•	•	✓


- Not available
- ✓ Standard

**Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the smart control function allows you to set your desired room temperature. As the room reaches your personal setting, the flame intensity and heat will gradually decrease – keeping the ambiance of your Regency fire on with less heat output, and the option to turn it off at any time.

OTHER OPTIONS

SAFETY SCREEN

Regency has integrated a custom designed safety screen into each faceplate design that meets or exceeds current North American safety legislation.

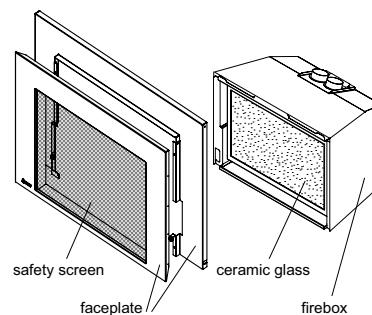

APP CONTROL*



The optional Wifi enabled module provides the ultimate fireplace control with the ProFlame Connect Plus App.

**Available on select units.*





Gi25, Gi27, Gi29 & Gi33 SPECIFICATIONS

Three-Sided Faceplate




Four-Sided Faceplate



	FACEPLATE	DIMENSIONS		C - DEPTH	D - BOTTOM HEIGHT
		A - WIDTH	B - HEIGHT		
Gi25	Regular Faceplate	35-3/4"	23-1/4"	1-1/4"	--
	3-Sided Flush Faceplate	35-3/4"	23-1/4"	1/8"	--
	4-Sided Flush Faceplate	35-3/4"	26-3/8"	1/8"	4-3/16"
	Screen with 3-Sided Finishing Trim	28-1/4"	18-3/4"	1/16"	--
	Screen with 4-Sided Finishing Trim	28-1/4"	20"	1/16"	1-1/8"
	Oversized Backing Plate	44-5/8"	29-5/8"	1/8"	--
	3-Sided Custom Backing Plate	30-1/4"	19-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	30-1/4"	22-1/8" - 45"	1/8"	2-1/8" minimum
Gi27	Regular Faceplate	35-3/4"	23-1/4"	1-1/4"	--
	3-Sided Flush Faceplate	35-3/4"	23-1/4"	1/8"	--
	4-Sided Flush Faceplate	35-3/4"	26-3/8"	1/8"	3-5/8"
	Screen with 3-Sided Finishing Trim	31-7/8"	19-3/4"	1/16"	--
	Screen with 4-Sided Finishing Trim	30-1/4"	21"	1/16"	1-1/8"
	Oversized Backing Plate	44-5/8"	29-5/8"	1/8"	--
	3-Sided Custom Backing Plate	30-1/4" - 56-7/8"	19-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	30-1/4" - 69"	22-1/8" - 45"	1/8"	2-1/8"
Gi29	Regular Faceplate	40-3/16"	26"	1-1/4"	--
	Regular Faceplate w/ Premium Surround	40-13/16"	26-3/8"	1-11/16"	--
	3-Sided Flush Faceplate	40-3/16"	26"	1/8"	--
	4-Sided Flush Faceplate	40-3/16"	29-1/4"	1/8"	4-3/16"
	Screen with 3-Sided Finishing Trim	31-7/8"	21-7/8"	1/16"	--
	Screen with 4-Sided Finishing Trim	31-7/8"	23-1/8"	1/16"	1-1/8"
	Oversized Backing Plate	47-1/2"	31-1/2"	1/8"	--
	3-Sided Custom Backing Plate	33-7/8" - 56-7/8"	22-7/8" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	33-7/8" - 69"	25-1/8" - 45"	1/8"	2-1/8" minimum
	Flush Faceplate w/Traditional Surround	45-3/4"	28-3/4"	2-1/4"	--
Gi33	Regular Faceplate	46-5/16"	30-7/8"	1-5/16"	--
	Regular Faceplate w/ Premium Surround	46-3/4"	31-1/8"	1-11/16"	--
	3-Sided Flush Faceplate	46-1/8"	30-3/4"	1/8"	--
	4-Sided Flush Faceplate	46-1/8"	37-1/16"	1/8"	6"
	Screen with 3-Sided Finishing Trim	35-15/16"	25-11/16"	1/16"	--
	Screen with 4-Sided Finishing Trim	35-15/16"	26-15/16"	1/16"	1-1/8"
	Oversized Backing Plate	50-1/4"	33"	1/8"	--
	3-Sided Custom Backing Plate	38" - 56-7/8"	26-3/4" - 44-7/8"	1/8"	--
	4-Sided Custom Backing Plate	38" - 69"	29" - 45"	1/8"	2-1/8" minimum
	Flush Faceplate w/Traditional Surround	51-5/8"	30-3/4"	2-3/16"	--

NOTE: All product specifications are subject to change without notice.
Always refer to the relevant product manual for full and up-to-date information.

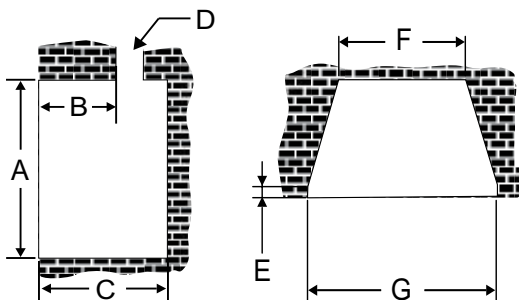


MINIMUM FIREPLACE DIMENSIONS

DIMENSIONS							
MODEL	A - HEIGHT	B - MAX. LINTEL BAR DEPTH	C - DEPTH	D - DAMPER OPENING	E - FRONT DEPTH TO TAPER	F - WIDTH (REAR)	G - WIDTH (FRONT)
Gi25	17"	10-1/2"	15"	8" x 4" min	1-5/8"	15"	25"
Gi27	18"	10-1/2"	15"	8" x 4" min	1-5/8"	17-1/2"	27"
Gi29	20-1/4"	11-3/8"	16-3/4"	8" x 4" min.	2-5/8"	20"	29"
Gi33	24"	12-1/4"	18"	9" x 5" min.	3-1/2"	22-3/8"	33"

NOTE: All product specifications are subject to change without notice.
Always refer to the relevant product manual for full and up-to-date information.


Gi25, Gi27, Gi29 & Gi33 SPECIFICATIONS

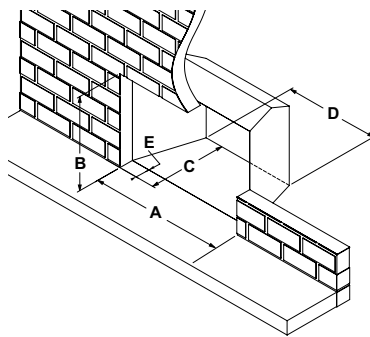


	FACEPLATE	DIMENSIONS				
		A - MINIMUM INSTALL WIDTH	B - MINIMUM INSTALL HEIGHT	C - MINIMUM INSTALL DEPTH	D - MINIMUM REAR WIDTH	E - TAPER DEPTH
Gi25	Regular Faceplate	25"	17"	15"	15"	1-5/8"
	Regular Faceplate w/ Backing Plate	26-3/4"	18-1/4"	15"	15"	3-1/8"
	Flush Faceplate	26-1/2"	18"	16-1/4"	15"	2-5/8"
	Flush Faceplate w/ Backing Plate	26-3/4"	18-1/8"	16-1/8"	15"	4"
	4-Sided Flush Faceplate	26-1/2"	18-1/8"	16-1-4"	15"	2-5/8"
	Finishing Trim	26-1/2"	18"	16-1-4"	15"	2-5/8"
	Finishing Trim w/ Backing Plate	26-3/4"	18-1/4"	16-1/8"	15"	4-1/4"
	4-Sided Finishing Trim	26-1/2"	18-1/8"	16-1/4"	15"	2-5/8"
Gi27	Regular Faceplate	27"	18"	15"	17-1/2"	1-5/8"
	Regular Faceplate w/ Backing Plate	29"	19-1/4"	14-7/8"	17-1/2"	3-1/8"
	Flush Faceplate	28-1/2"	19"	16-1/4"	17-1/2"	2-5/8"
	Flush Faceplate w/ Backing Plate	29"	19-1/4"	14-1/8"	17-1/2"	5/8"
	4-Sided Flush Faceplate	28-1/2"	19-1/4"	16-1/4"	17-1/2"	2-5/8"
	Finishing Trim	28-1/2"	19"	16-1/4"	17-1/2"	2-5/8"
	Finishing Trim w/ Backing Plate	29"	19-1/4"	16-1/8"	17-1/2"	4-1/2"
	4-Sided Finishing Trim	28-1/2"	19-1/4"	16-1/4"	17-1/2"	2-5/8"
Gi29	Regular Faceplate	28-7/16"	20-1/4"	16-11/16"	20"	2-13/16"
	Regular Faceplate w/ Backing Plate	30-7/8"	21-7/16"	16-3/4"	20"	2-11/16"
	Regular Faceplate w/ Premium Surround	28-7/16"	20-1/4"	16-5/8"	20"	2-5/8"
	Regular Faceplate w/ Premium Surround and Backing Plate	30-7/8"	21-7/16"	16-1/2"	20"	2-1/2"
	Flush Faceplate	30"	21-1/16"	17-15/16"	20"	3-7/8"
	Flush Faceplate w/ Backing Plate	30-7/8"	21-7/16"	17-13/16"	20"	3-3/4"
	4-Sided Flush Faceplate	30"	21-5/16"	17-15/16"	20"	3-7/8"
	Finishing Trim	30"	21-1/16"	18"	20"	3-15/16"
	Finishing Trim w/ Backing Plate	30-7/8"	21-7/16"	17-7/8"	20"	3-7/8"
	4-Sided Finishing Trim	30"	21-5/16"	18"	20"	3-15/16"
	Flush Faceplate w/Traditional Surround	28-7/16"	20-1/4"	15-15/16"	20"	1-7/8"
Gi33	Regular Faceplate	33"	24"	18"	22-3/8"	3-1/2"
	Regular Faceplate w/ Backing Plate	34-7/8"	25-1/4"	17-7/8"	22-3/8"	4-1/8"
	Regular Faceplate w/ Premium Surround	33"	24"	17-3/4"	22-3/8"	3-3/16"
	Regular Faceplate w/ Premium Surround and Backing Plate	34-7/8"	25-1/4"	17-5/8"	22-3/8"	4-1/8"
	Flush Faceplate	34-1/8"	24-7/8"	19-3/16"	22-3/8"	4-1/2"
	Flush Faceplate w/ Backing Plate	34-7/8"	25-1/4"	19-1/8"	22-3/8"	4-3/8"
	4-Sided Flush Faceplate	34-1/8"	25"	19-1/4"	22-3/8"	4-1/2"
	Finishing Trim	34-3/16"	24-7/8"	19-1/4"	22-3/8"	4-1/2"
	Finishing Trim w/ Backing Plate	34-7/8"	25-1/4"	19-3/16"	22-3/8"	4-1/8"
	4-Sided Finishing Trim	34-3/16"	25"	19-1/4"	22-3/8"	4-1/2"
	Flush Faceplate w/Traditional Surround	33"	24"	17-1/8"	22-3/8"	2-1/2"

DIMENSIONS


LRI6E, LRI4E, LRI3E, E33, L234, U31 SPECIFICATIONS




FRONT VIEW



TOP VIEW



SIDE VIEW OF HRI6E,
LRI6E, HRI4E, LRI4E,
HRI3E, LRI3E, E33, L234



SIDE VIEW
OF U31

UNIT	A	B	A1	B1	C	D	F	G
LRI6E	33-15/16"	23-5/8"	28-3/16"	18-5/16"	19-3/16"	14-11/16"	--	24-1/2"
LRI4E	30"	20"	24-3/16"	14-3/4"	17-7/8"	14-5/16"	--	21-11/16"
LRI3E	28"	19"	22-11/16"	14-1/4"	14"	10-3/8"	--	21-1/4"
E33	32-1/4"	23-3/4"	30-3/8"	14-3/4"	16-1/4"	11-1/16"	--	24-1/2"
U31	26-1/16"	20-1/4"	24-1/2"	13"	13-1/2"	11"	11/16"	22-1/2"
L234	24-3/4"	16-7/8"	17-3/4"	12-1/2"	14-11/16"	11-3/4"	--	14-3/4"

BACKING PLATE DIMENSIONS


BACKING PLATE	LRI6E		LRI4E		LRI3E	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Small	41"	27-3/4"	37-1/8"	23-5/8"	31-1/4"	23-3/8"
Regular (3-sided)	47-3/8"	30-1/2"	41-5/8"	26"	35-3/4"	25-5/8"
Regular (4-sided)	47-3/8"	34-1/8"	41-5/8"	29-1/4"	35-3/4"	28-5/8"
Oversized	48-3/8"	33"	44"	30"	38-3/16"	29-5/8"
Custom Backing Plate	Custom Order Only					

BACKING PLATE	LRI6E			LRI4E			LRI3E		
	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT
Arched	50-7/8"	33-1/16"	29-13/16"	45-7/8"	28-15/16"	25-15/16"	40-15/16"	27-11/16"	24-1/2"

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

LRI6E, LRI4E, LRI3E, E33, L234, U31 SPECIFICATIONS

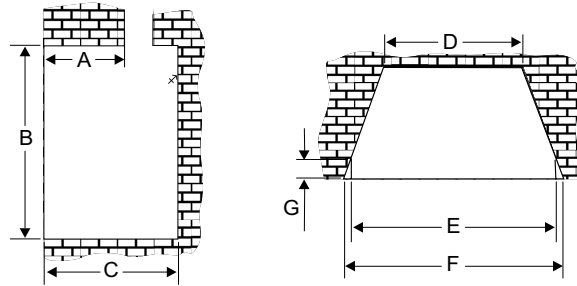

MINIMUM FIREPLACE OPENINGS		A	B	C	D	E	F	G
LRI6E	Vignette Faceplate	12-1/2"	24"	19-1/2"	25"	34"	37"	4-3/4"
	Vignette Faceplate + Spacer	10"	24"	16-3/4"	25"	34"	35-3/8"	2-1/4"
	Arched Vignette Faceplate	13-1/2"	25-3/4"	22-3/8"	25"	35-3/4"	37"	6"
	Arched Vignette Faceplate + Spacer	12"	24"	19-1/2"	25"	34"	36-1/4"	4-3/4"
LRI4E	Vignette Faceplate	12-1/4"	20"	18"	22"	30"	35-5/8"	4-3/8"
	Vignette Faceplate + Spacer	10"	20"	15-3/4"	22"	30"	31-1/4"	2-1/8"
	Arched Vignette Faceplate	14"	21-1/2"	21-1/8"	22"	30-1/2"	37"	5-3/8"
	Arched Vignette Faceplate + Spacer	12-1/2"	20"	17-1/2"	22"	30"	36-1/4"	4"
LRI3E	Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-1/2"	31-1/8"	4"
	Arched Vignette Faceplate	8-5/8"	19-1/2"	14-1/2"	21-5/8"	28-5/8"	31-1/8"	4"
E33	Low Profile Faceplate	9-1/4"	25-1/2"	18"	25"	N/A	35-1/4"	N/A
	Low Profile Faceplate + Spacer	8"	24-3/16"	16-3/4"	25"	N/A	32-1/4"	N/A
U31	Low Profile Faceplate	8-1/8"	21"	15"	22-1/2"	N/A	26-1/2"	N/A
L234	Low Profile Faceplate	N/A	17"	14" (with spacer) 15-5/8" (without spacer)	16"	N/A	25"	N/A

A - Max. lintel bar depth

G - Front depth prior to taper

FACEPLATES	LRI6E		LRI4E		LRI3E	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Vignette and Rustic Vignette	40-1/16"	26-13/16"	35-1/16"	22-11/16"	29-1/4"	22-1/8"
Vignette Spacer	39-15/16"	26-3/4"	34-15/16"	22-5/8"	--	--
Hearth Trim - Sizes	Please See Manual For Details					

FACEPLATES	LRI6E			LRI4E			LRI3E		
	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT	WIDTH	CENTRE HEIGHT	CORNER HEIGHT
Arched Vignette	45-3/8"	30-7/16"	27-13/16"	40-1/4"	26-1/8"	23-3/4"	35-15/16"	25-3/16"	22-3/4"
Spacer	45-3/8"	30-7/16"	27-13/16"	40-1/4"	26-1/8"	23-3/4"	--	--	--

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.

DIMENSIONS

FACEPLATES		E33		U31		L234	
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Vignette (3-Sided)		46-1/2"	28-3/4"	--	--	--	--
Vignette (4-Sided)		46-1/2"	30-7/8"	--	--	--	--
Custom Faceplate (3-Sided Vignette Only)		Custom Order Only		--	--	--	--
Spacer (3-Sided Vignette Only)		45"	28"	--	--	--	--
Low Profile (3-Sided)	Front Plate	42-7/16"	26-3/4"	36"	22-1/8"	29-1/8"	21"
	Rear Plate	46-1/2"	28-11/16"	40-13/16"	24"	32-7/8"	22-7/8"
Low Profile (3-Sided Oversize)	Front Plate	42-7/16"	26-3/4"	--	--	--	--
	Rear Plate	49-9/16"	33-1/8"	--	--	--	--
Low Profile (3-Sided) Custom	Rear Plate	Custom Order Only					
Low Profile (4-Sided) Custom	Rear Plate	Custom Order Only					
Hearth Trim - Sizes		Please See Manual For Details					


MINIMUM CLEARANCES

MINIMUM CLEARANCE TO COMBUSTIBLES	Gi25LE	Gi27LE	Gi29LE	Gi29LU	Gi33LE
A Side Wall	8"	8"	8"	8"	8"
B Ceiling	60"	60"	60"	60"	60"
C Mantel Height (Min.)	29-5/8"	30"	32-3/4"	32-3/4"	36-1/2"
	(With Optional Deflector)	26-5/8"	28"	30-3/4"	34-1/2"
D Mantel Depth (Min.)	1-1/2"	9"	1-1/2"	1-1/2"	1-1/2"
	(With Optional Deflector)	1-1/2"	9"	1-1/2"	1-1/2"
E Alcove Width	54"	54"	54"	54"	56"
F Max. Alcove Depth	36"	36"	36"	36"	36"

NON-COMBUSTIBLE HEARTH REQUIREMENT

G Hearth Height	0"	0"	0"	0"	*0-2"
H Hearth Width	0"	0"	0"	0"	*36"
I Hearth Depth	0"	0"	0"	0"	*12"

* Hearth not required if appliance is raised off the ground 2" from Finished Floor.

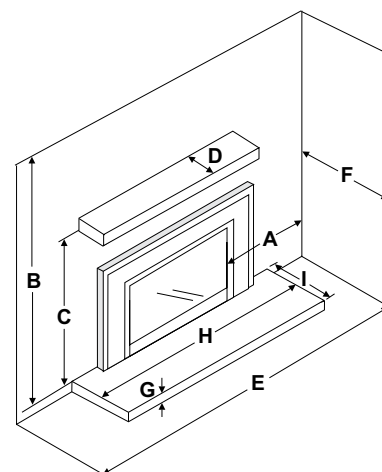

MINIMUM CLEARANCE TO COMBUSTIBLES	LRi6E	LRi4E	LRi3E	E33	U31	L234
A Side Wall	12"	8"	6"	8"	10"	8"
B Ceiling	60"	60"	60"	72"	67"	73"
C Mantel Height (Min.)	40"	35"	38"	40"	32-1/2"	38"
	(With Optional Deflector)	36"	32"	28"	N/A	N/A
D Mantel Depth (Min.)	1"	1"	1"	0 - 3-1/2"	0 - 3-1/2"	1"
	(With Optional Deflector)	1"	1"	1"	N/A	N/A
E Alcove Width	56"	54"	54"	76"	48"	60"
F Max. Alcove Depth	36"	36"	36"	36"	36"	36"


NON-COMBUSTIBLE HEARTH REQUIREMENT

G Hearth Height	1-3/8"	1/2"	1/2"	1-1/4"	0"	1-1/2"
H Hearth Width	44"	40"	36"	45-1/2"	0"	28"
I Hearth Depth	14"	14"	12"	13"	0"	12"

NOTE: All product specifications are subject to change without notice. Always refer to the relevant product manual for full and up-to-date information.



Find More Products at **REGENCY-FIRE.COM**



©2026 FPI Fireplace Products International Ltd. Regency®, Regency Liberty®, Regency Energy™ and Surefire™ are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved.
Printed in Canada (05/26)
Part no. 944-072

Your Regency Dealer